



Red Smooth

Red Smooth

Manufactured to BS EN 771-1

Brick type

Category II, HD, Clay Masonry Unit

Standard work size

215 x 102.5 x 65mm
215 x 102.5 x 73mm

Dimensional tolerances

Tolerance category: T2
Range category: R1

Compressive strength

≥ 75N/mm²

Water absorption

≤ 7%

Durability

F2

Active soluble salts content

S2

Configuration

Vertically Perforated 23-28% voids

Dry weight per brick

2.50kg


Pack size

504

Data relates to 215x102.5x65mm brick only
This panel is printed on paper made using ecf from fibres
obtained from a sustainable timber source.

DISCLAIMER:

The reproduction of colours and textures is only as accurate as
the printing process will allow. Photographic samples should be
used when shortlisting products but we advise that an actual
sample should be seen before ordering.

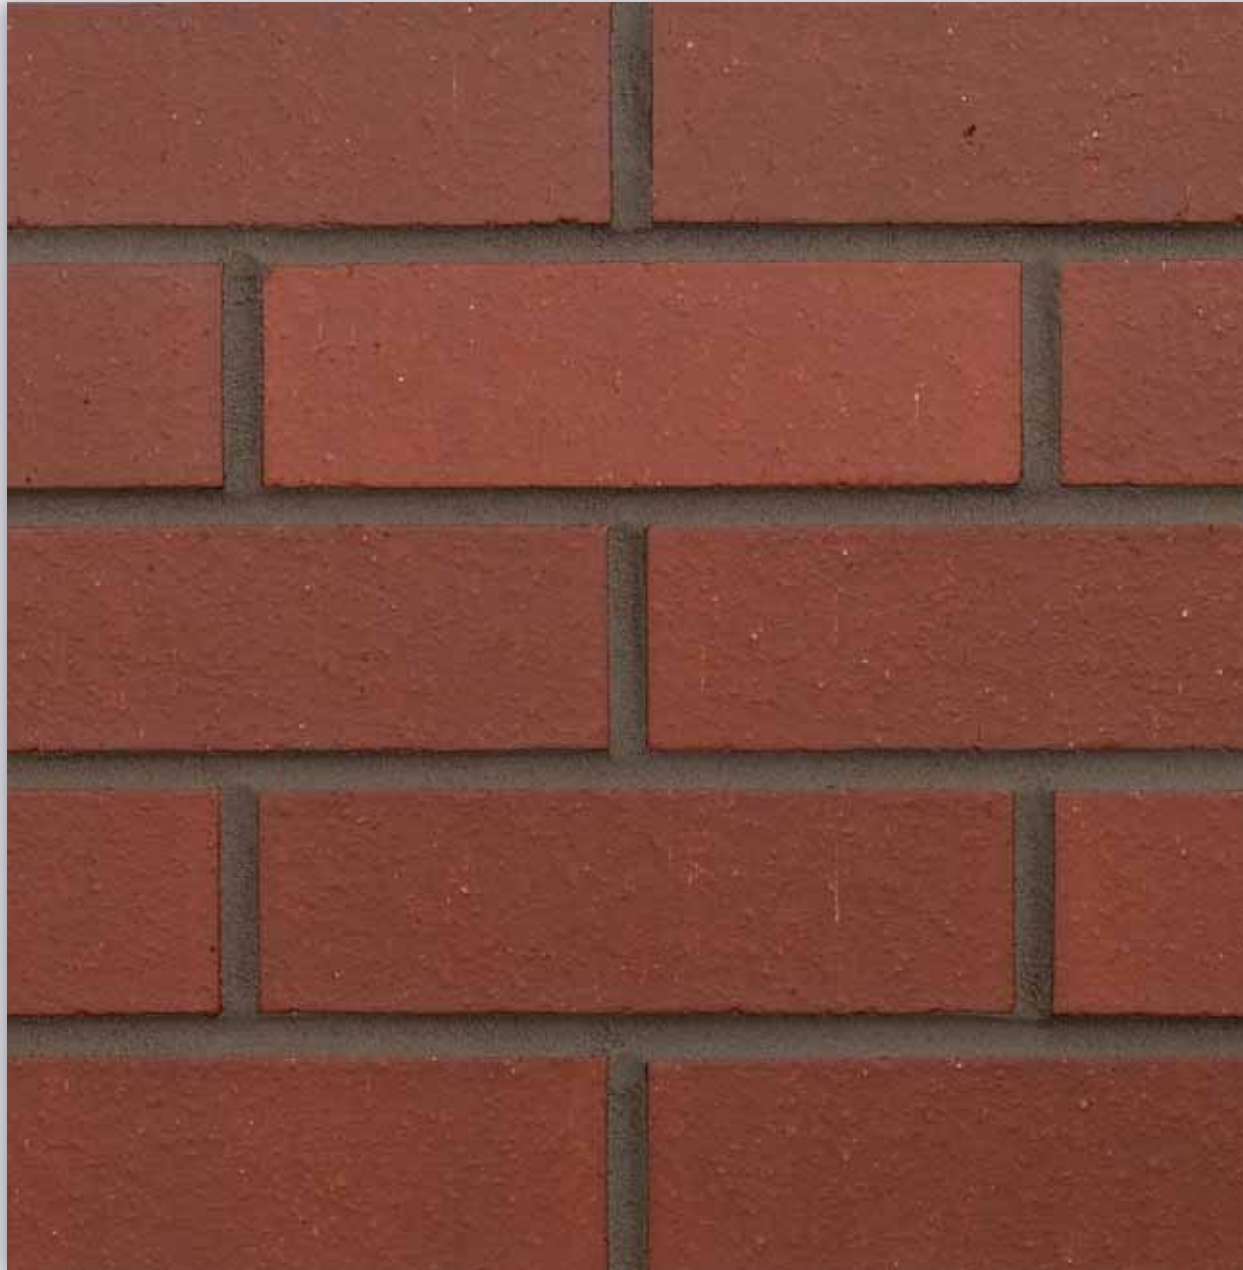

Hanson
Head Office
Stewartby
Bedford
MK43 9LZ

Tel: 08705 258258
Fax: 01234 762040

www.hanson.com/uk